



FCS Technology Insertion and Transition



Dr. Paul Rogers
Executive Director of Research
Tank Automotive Research, Development & Engineering Center



Distribution Statement A. Approved for Public Release.
Distribution is unlimited.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 18 APR 2007		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE FCS S&T Transition and Maturity				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Rogers, Dr. Paul				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US ARMY TACOM 6501 E. 11 Mile Road Warren, MI 48397-5000				8. PERFORMING ORGANIZATION REPORT NUMBER 17067	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) TACOM TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) 17067	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at 8th Annual Science & Engineering Technology Conference, The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 14	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Ground Vehicle Systems and Support Equipment – For Today and Tomorrow



Current

70 ton main battle tank

Unarmored Tactical

100% Manned Systems

Conventional Power Trains

Passive Suspension

Steel Track

Periscopes

Conventional Armaments

Point to point Voice Communication

Enabling the Future Force
Enhancing the Current Force



Future

25-30 ton manned ground vehicle (FCS (BCT))

Armored Tactical

Combined Manned/
Unmanned Capabilities

Hybrid Electric Systems w/
exportable power

Active Suspension

Segmented Band Track

Indirect Vision Driving

High Power (EM) and
Laser Weapons

Shared Common Operating Picture

Onboard Water Generation

Fire-Resistant Fuels

Laser Protection

Diagnostics/prognostics

Integrated C4ISR



RDECOM S&T Supporting FCS

Ground Vehicle Power and Mobility

Survivability

EGTL

ARMOR

GVPM
Programs

KE APS

Intelligent Systems

P&E SIL


RVT Overview

Water from Air

Autonomous Platform

CHALLENGES

S&T Investment for FCS Armor

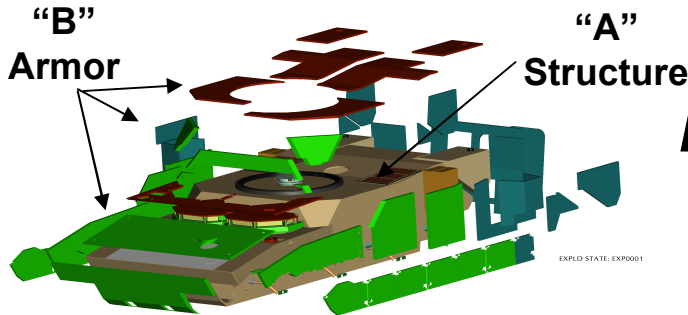

New Materials & Mechanisms For Bx Armors

Functionally Layered Armor Design

Functions:

1. Cover Plate

- Prevent nuisance damage

2. Ceramic


- Break & Erode Penetrator

3. Tile Enhancement & Isolation

- Mitigate Damage

4. Backing

- Support and containment

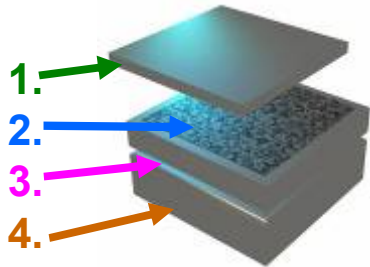

B1/U1

1. 2D- Composites

- Aluminum
- Titanium

2. SiC-N



3. Rubber



4.


- 2-D Composites
- Al/ Ti

B2/U2


1. Particulate Metal Matrix Composites (MMCs):

2.

- SiC-XY
- Encapsulation:



3. Periodic Core:




4.

- 3-D Composites
- Through-Thickness Textiles




B3/U3

1. Intermetallic Hybrid Laminates:



2.

- Ceramic Matrix Composites (CMCs)
- Functionally Graded CMCs



3.

- Intermetallic Hybrid Laminates



- Fibrous MMCs

- Gen II Periodic Core


- Self-Confining Mat'ls

4.

- Hybrid 3-D Textile Composites



- Nano MMCs




S&T Investment for FCS Armor

Problem: FCS “B” armor solutions that are lighter weight and provide increased protection against bullets, projectiles, and blast threats (FY07-FY12)


Approach: Improve and exercise M&S tools coupled with T&E to insert improved materials into armor recipes

Product:


- Improved Armor Designs
- Advanced M&S tools
- Start of next generation armor materials

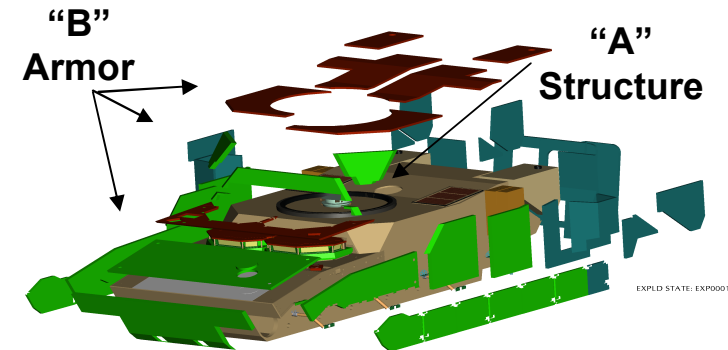

Structural Armor
Ceramic Composite
Ceramic Metallic

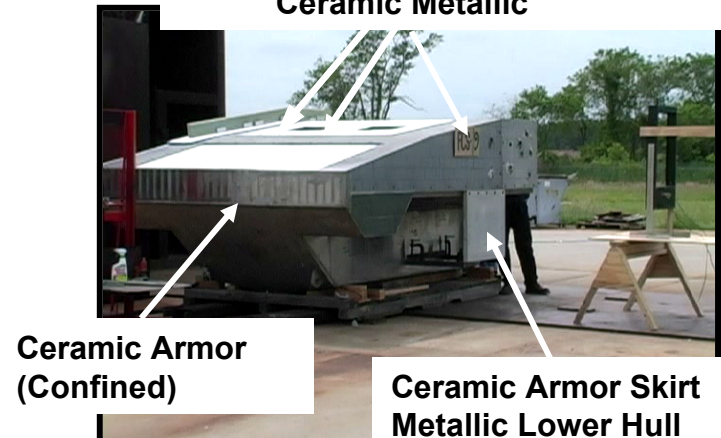

KE Active Protection System



Purpose:

- *Provide capability to identify, classify, and defeat FCS Tank-fired Threats as defined by ORD and PIDs.*
- *Threats include*
 - *Objective Tank-Fired (i.e. Kinetic Energy)*

Results:

- *Does:*
 - *Develops two color IR cueing sensor, 3 warhead designs & 2 interceptor chassis designs*
 - *Conducts robust component testing*
 - *Provides TRL 6 cueing sensor & countermeasure interceptor ready for systems level testing*
- *Does Not:*
 - *Develop tracking sensors or launcher*
 - *Conduct systems integration*
 - *Conduct vehicle integration*
 - *Conduct system level end-to-end testing*

Payoff:

- *Enhances protection of FCS against tank-fired threats*
- *Transitions to PM FCS in FY09 for SDD*

Ground Vehicle Power and Mobility - FCS Technologies

High Performance Engine Research (HIPER)

Objective: Develop engine technology to provide 30% increase in system, power density and 30% weight decrease. Develop turbocharger for torque rise, improved response and increased engine power.



Power & Energy System Integration Labs (SIL)

Objective: Evaluation and integration of power and energy technologies in a “form, fit and function” environment.



Li-Ion Battery Technology

Objective: Develop Li-ion battery with energy density of 120 Wh/kg.




Advanced Lightweight Track

Objective: Develop lightweight, robust and logistically supportable track for FCS MG. V.




IPM Traction Motor Technology

Objective: New motor concept with high torque & high power density. The demonstration and test data will be transitioned in Dec 07.




SiC Power Electronics


Objective: Develop compact, high temperature, lightweight power electronics.

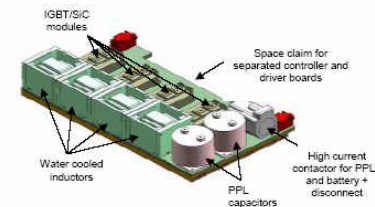

Robotic Vehicle Technology Overview

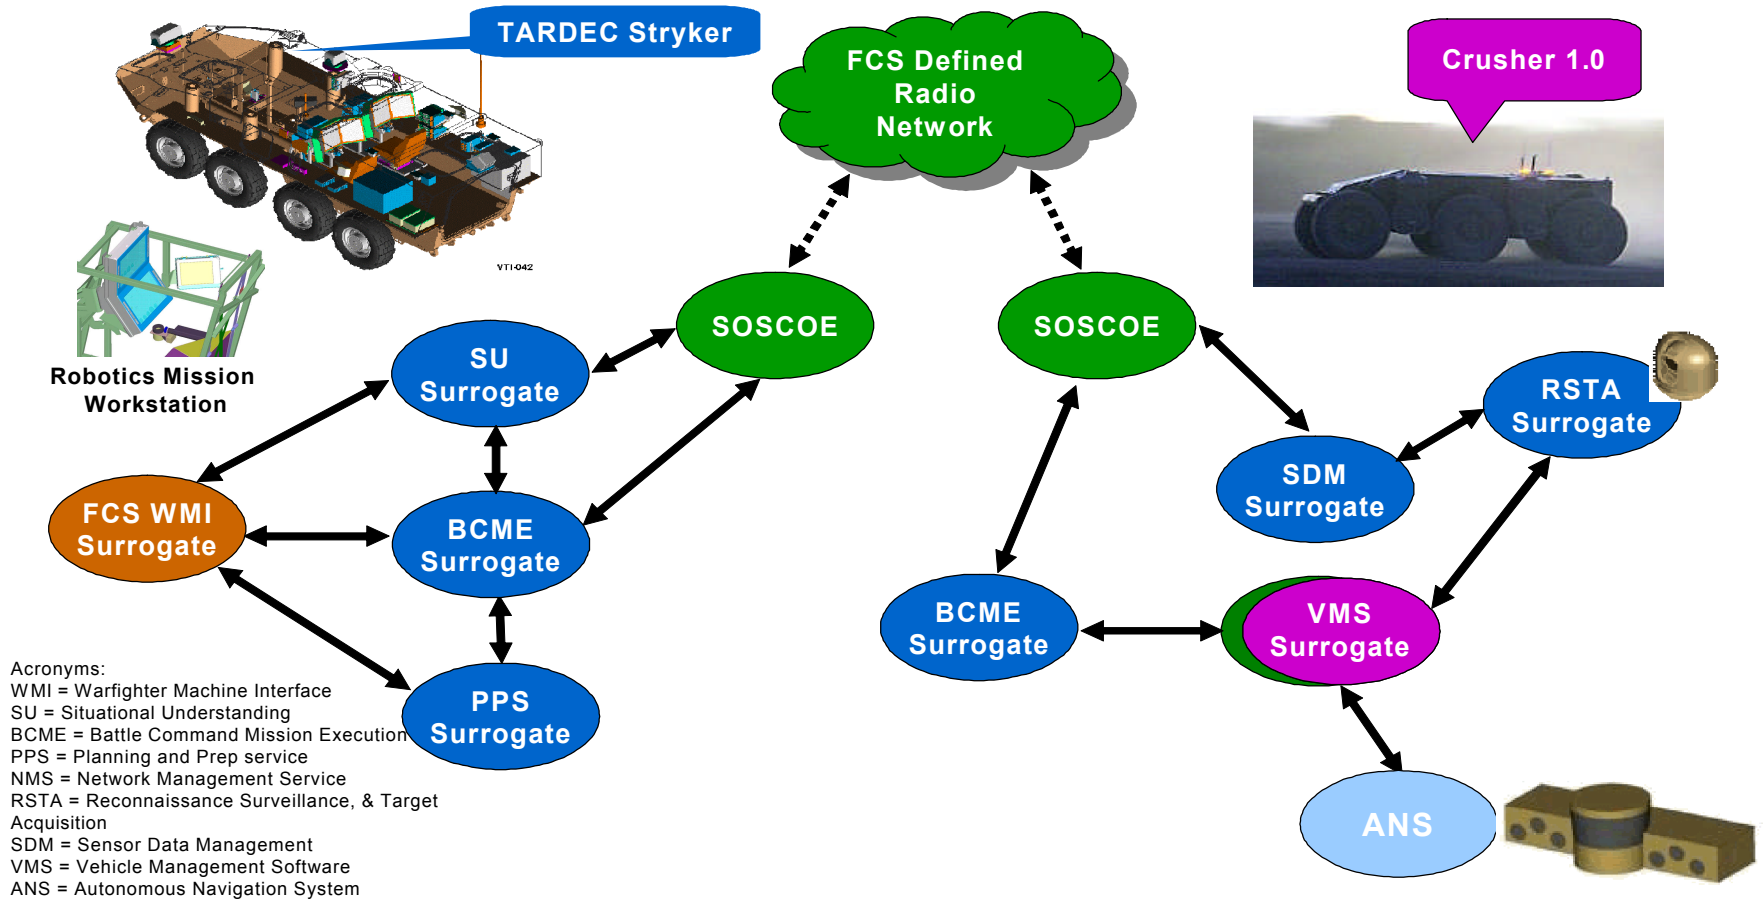

RVT ATO Overview



FCS Representative Interfaces to be Monitored for Performance In UGV Functional Testing

Autonomous Platform Demonstrator




UPI: UGV Perception Integration



CRUSHER

Existing DARPA/CMU-NREC
Crusher 1.0

PM FCS
ARV SFR Requirements



Hybrid
Drive
Technology

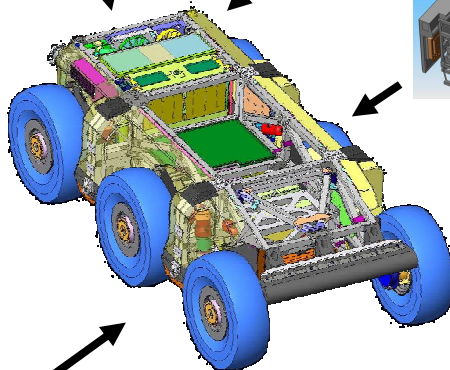

Suspension
Technology

Purpose:

- This platform demonstrator will develop, integrate, and test next generation UGV mobility technologies such as hybrid electric drive systems, advanced suspension systems, lightweight chassis technologies, and efficient, low density auxiliary systems integrated on a single platform while preserving deployability of 2 in a C-130.
- To design, integrate, and test (platform mobility/system performance) guided by and based on FCS ARV SFR requirements/specifications (including weight, mobility performance, and size).
- To develop an Autonomous Platform Demonstrator (APD) for the demonstration of ARV platform technologies developed under the ATO D.TAR.2008.04, Robotic Vehicle Technologies (RVT) for FCS ATO on an improved UGV platform.


Results:

- Platform capable of demonstrating reliable mobility drivetrain and chassis subsystems (engine, transmission, suspension, and hybrid electric drive).
- Engineering data through platform mobility and performance testing to refine ARV SDD-level designs.

Payoff:

- Continuing to develop and mature UGV core mobility technologies into the APD will benefit all unmanned platform mobility, subsystem and control development.
- Higher performing UGV platform for continued ATO control experimentation.
- Integrated APD platform and experimentation data that provides design risk reduction for ARV platform rqmts.

Water From Air

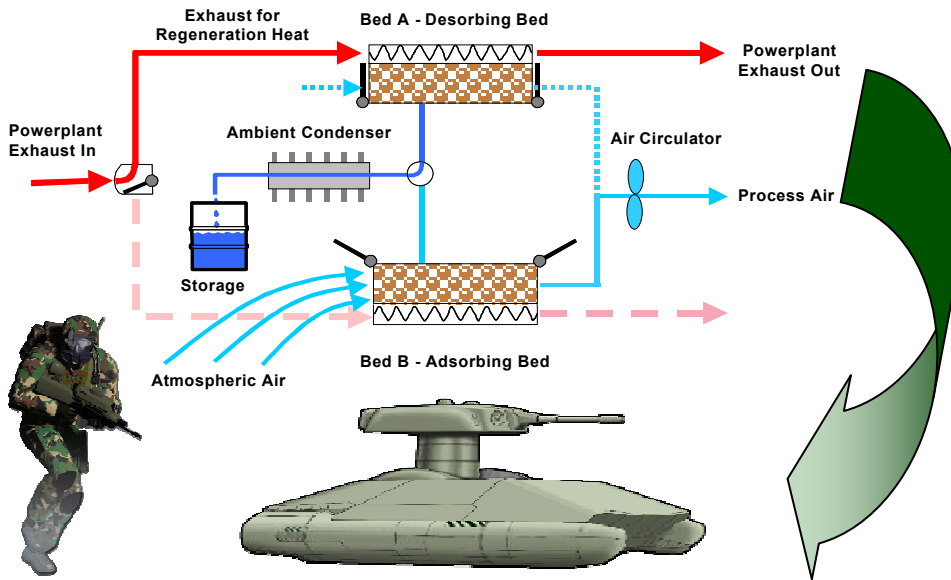

Purpose:

- Develop the capability to produce drinking water from systems embedded in combat platforms by harvesting water from humidity sources, including the atmosphere & crew compartments – reduce the large water logistical footprint.

Product:

- Lightweight, energy efficient device to generate water from air for units or platform integration.

(Warfighter) Payoff:

- Reduces the logistical footprint associated with water storage and distribution by 50 to 66%.
- Enables soldiers/systems/units to operate without resupply for 72 hours.
- Transitions to FCS, PAWS, HTV, FTTS and/or FFW demonstrators.



Technical Challenges

Armor:

- Appropriate weight/volume goals
- Improved materials that utilize current “understood” defeat mechanisms
- M&S tools that capture micro and macro responses
- Alternative defeat mechanisms – disruptive technologies (less dependence on passive armor)

KE APS:

- Increase frame rate from 100 Hz to 400 Hz to improve clutter rejection and threat classification
- Implement “Rapid Declaration Of Threats” to meet stressing threat timeline
- Increase Red Band sensitivity to improve clutter rejection and threat classification

Water from Air:

- Operation over a militarily relevant range of environmental conditions.
- System energy efficiency.
- System deployability.

Technical Challenges

Robotic Vehicle Technologies:

- Sensors for perception and terrain understanding to enable higher speed (greater than 65 KPH) autonomous navigation in increasingly complex environments (cluttered urban)
- Advancements in obstacle detection & terrain classification
- System Self Security
- Technologies to enable tighter teaming between Soldiers and robots
- Human Factors

Technical Challenges

Mobility:

▪High Performance Engine Research (HIPER) -

Challenges: *Engine work would have to transition to an ATO-D. Diesel combustion rate/engine speed is limited due to burn time. Peak cylinder pressure/ rate of rise is difficult to control.*

▪Li-Ion Battery Technology -

Challenges: *Maximizing the battery energy content in space and weight limitations, manufacturing process development and cost control, current technology will not meet FCS goals for silent watch requirement of 833 wh/kg with batteries alone.*

▪Advanced Lightweight Track -

Challenges: *Segmented band track will achieve TRL 6 maturity by Dec 08. Back-up Hybrid steel track will only achieve TRL 5 by Dec 08.*

▪IPM Traction Motor Technology -

Challenges: *The IPM a new motor technology. The Demonstration and test data will be transitioned in Dec 07. Further development is required for vehicle Integration Current motor technologies require. Improvements in thermal management.*

▪SiC Power Electronics -

Challenges: *SiC material quality and device yield require further improvement before transitioning for production. Currently only SiC diodes can be transitioned.*

Contact Information

Dr. Paul Rogers

(586) 574-6378

RogersP@tacom.army.mil

<http://tardec.army.mil>

TARDEC BOOTS
ARE ON THE GROUND